

PRORIL

50 Hz


Designed for continuous operations, excellent performance and easy maintenance, PRORIL Tank series pumps have proven their reliability and durability in demanding areas like construction, mining, tunneling, quarries, industries and rental applications.

Dewatering Pump

TANK SLIM 380



High Chrome Dewatering Pump



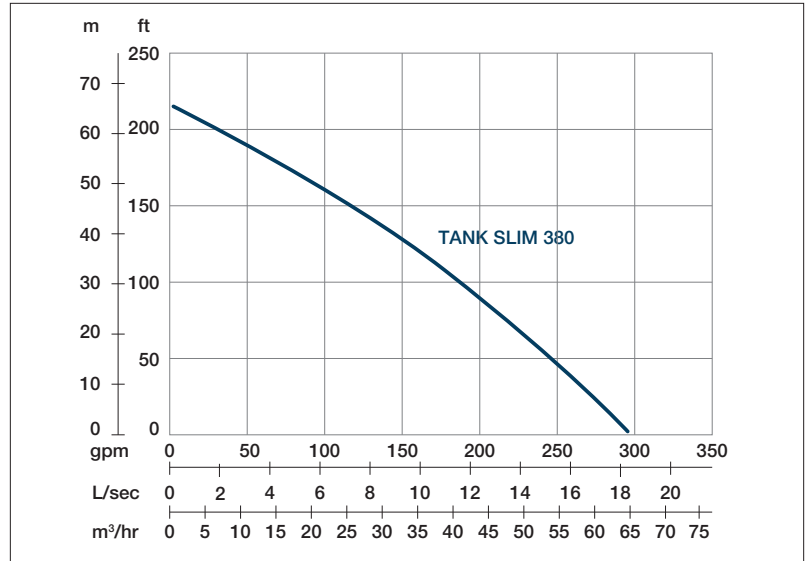

Shaft Speed : 2850rpm Solid Passage : 8mm Outlet : 80mm, 3in

OUTPUT	HEAD	FLOW
8 kW	Rated : 40m, 131ft	Rated : 10 l/s, 158 gpm
11 HP	Max : 65m, 213ft	Max : 18.3 l/s, 290 gpm

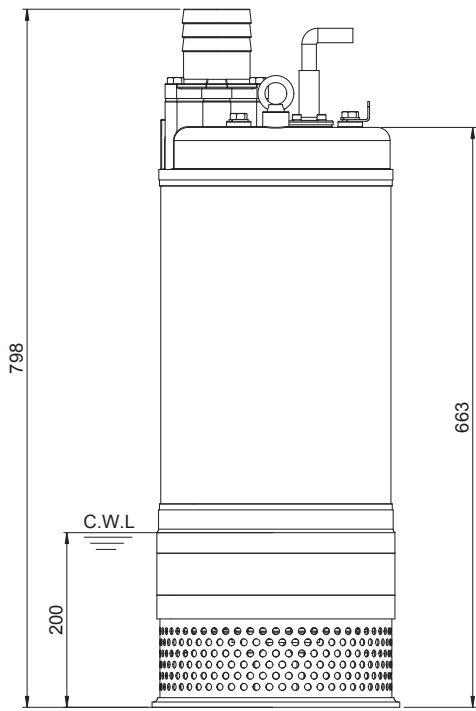

Weight : 92kg / 202.4lbs

Pump Type	Electric Submersible Pumps	
	Three Phase	
	IP 68	
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Circle Thermal Protector
	Starter Method	D.O.L.
Lubricant	Food Grade (ISO VG32)	
Impeller Type	Opened · Dual impellers	
Shaft Seal	Double Mechanical Seal	
	Silicon Carbide VS Ceramic / Carbon	
Bearings	C3 Shielded ball bearings	
Cable	H07BQF	
	Length: 20m (66ft) or longer upon request.	
Materials	Pump Casing	Gray Iron
	Impeller	Chromium Iron
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Outer Cover	Stainless Steel
Strainer	Stainless Steel	
Max. Liquid Temperature	40°C (104°F)	
Max. Submersion Depth	20m (66ft)	
pH Range	pH 5 - pH 8	